


Pack of 2pcs, 2.5" NB 70 ShA EPDM WRAS APPROVED Full Face ASA 150 Gasket

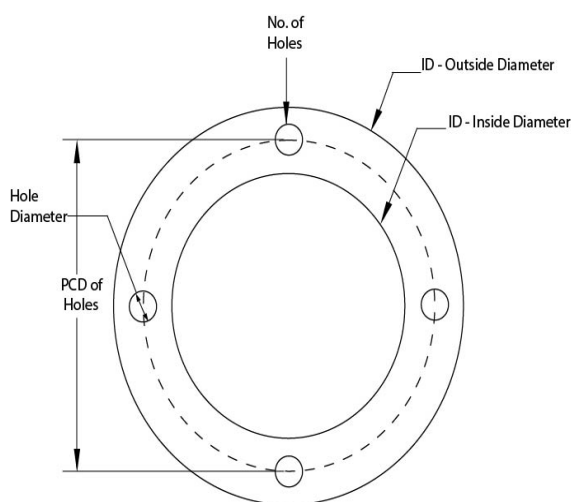

Product SKU:	2RGF150E70DWI730178T3
Material:	EPDM
Colour:	Black
Table Reference:	ASA 150
Gasket Type:	Full Face
Nominal Bore:	2.5"
Internal Diameter:	73mm
Outside Diameter:	178mm
Thickness:	3mm
Hardness:	70 ShA
Number of Holes (if Full Face):	4
Hole Diameter (if Full Face):	19mm
PCD of Holes (if Full Face):	139.7mm
Weight:	0.61kg
Operating Temperature Range:	-15°C to 350°C

These ASA 150 full face gaskets are manufactured from WRAS approved EPDM material, making them ideal for potable water applications. Suitable for use in water treatment plants, plumbing systems, and municipal water supplies, these gaskets meet the necessary standards for drinking water safety and performance.

Key Benefits:

- Produced using a EPDM WRAS approved gasket material
- Approved for use in potable water applications up to 23°C
- Typically used in water pipe applications
- Cloth impression on both sides of gasket

Applications:

- Potable Water Supply Systems
- Municipal Water Infrastructure
- Plumbing Systems
- Low-Temperature Water Applications
- Pipeline Flange Sealing
- Water Filtration and Purification Systems
- WRAS-Compliant Installations

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.
All sales subject to our standard terms www.polymax.co.uk/sales-terms

Approved Features:

WRAS

BE EN 681-1 for Potable Water

Physical Property	Test Method	Unit	Typical Values
Hardness		ShA	70
Density (g/cm ³)	ASTM D2240	g/cm ³	1.22
Tensile Strength	ASTM D412	MPa	9
Elongation	ASTM D412	%	200
Compression Set	ASTM D395 Method B	%	20

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.
All sales subject to our standard terms www.polymax.co.uk/sales-terms